

Tappi in nylon copri-lavorazione Nylon cover for bolt hole



Codice Code	Lunghezza X Length X	Confezioni Packaging
TAPPCO	32	500
TAPPLU	42	500

Lame parafreddo Nylon cover for bolt hole


CARATTERISTICHE TECNICHE:

- Movimento basculante frizionato
- Corsa 14 mm.
- Molle in acciaio zincato e bielle di spinta in PA 20% fibra di vetro
- Profili in alluminio in lega 6060 T6.
- Sfilabilità meccanismo lato cerniera dopo il fissaggio.

TECHNICAL CHARACTERISTICS:

- Graduated scissor action
- 14 mm. maximum drop.
- Galvanised steel flat springs and actuators in PA reinforced with 20% glassfibre..
- 6060 T6 aluminium alloy profiles.
- Mechanism removable from hinge side after fixing.


LPF/E

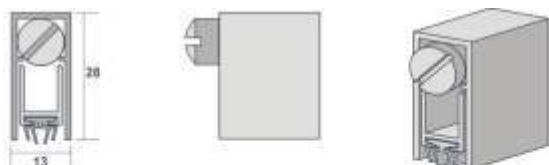

Codice Code	Lunghezza Length	Confezioni Packaging
LPF/E33	cm 33	5
LPF/E43	Cm 43	5
LPF/E53	Cm 53	5
LPF/E63	Cm 63	5
LPF/E73	Cm 73	5
LPF/E83	Cm 83	5
LPF/E93	Cm 93	5
LPF/E103	Cm 103	5
LPF/E113	Cm 113	5
LPF/E123	Cm 123	5

Pulsante in acciaio, regolabile con cacciavite a stella, taglio e con chiave fissa da 6 mm.
Steel plunger, adjustable with crosshead screwdriver, slotted screwdriver, and 6 mm spanner.


LPF/A

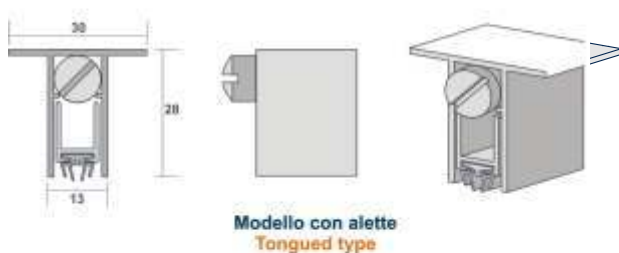

Codice Code	Lunghezza Length	Confezioni Packaging
LPF/A33	cm 33	5
LPF/A43	Cm 43	5
LPF/A53	Cm 53	5
LPF/A63	Cm 63	5
LPF/A73	Cm 73	5
LPF/A83	Cm 83	5
LPF/A93	Cm 93	5
LPF/A103	Cm 103	5
LPF/A113	Cm 113	5
LPF/A123	Cm 123	5

Pulsante in acciaio, regolabile con cacciavite a stella, taglio e con chiave fissa da 6 mm.
Steel plunger, adjustable with crosshead screwdriver, slotted screwdriver, and 6 mm spanner.

LPF/L

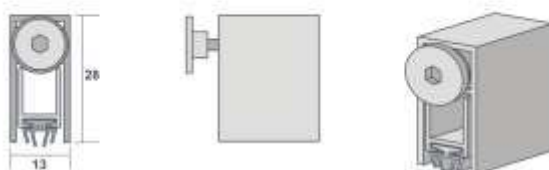

Codice Code	Lunghezza Length	Confezioni Packaging
LPF/L33	cm 33	5
LPF/L43	Cm 43	5
LPF/L53	Cm 53	5
LPF/L63	Cm 63	5
LPF/L73	Cm 73	5
LPF/L83	Cm 83	5
LPF/L93	Cm 93	5
LPF/L103	Cm 103	5
LPF/L113	Cm 113	5
LPF/L123	Cm 123	5

Pulsante autodirezionale snodato, metallico con cappuccio in Nylon regolabile con chiave esagonale da 3 mm.
Self-directing articulated metal plunger with nylon cap, adjustable with a 3 mm Allen wrench.